

### DESCRIPTION

The Badger Meter ModMAG<sup>®</sup> M2000 is the result of years of research and field use of electromagnetic flow meter technology. Based on Faraday's law of induction, these meters can measure water, wastewater, water-based fluids and other liquids that meet minimum electrical conductivity.

Designed, developed and manufactured under strict quality standards, this meter features sophisticated, processor-based signal conversion with accuracies of  $\pm 0.20\%$  of rate  $\pm 1$  mm/s. The wide selection of liner and electrode materials helps provide maximum compatibility and minimum maintenance over a long operating period.

The meter is best suited for bidirectional flow measurement of fluids with a conductivity  $> 5 \mu\text{S}/\text{cm}$  ( $> 20 \mu\text{S}/\text{cm}$  for demineralized water). The meter has high accuracy, is easy to use, and can be chosen for a wide variety of applications. The backlit, four-line display shows all actual flow measuring data, daily and complete information, including alarm messages. The standard transmitter has 4 programmable digital outputs, one digital input, power output and different interfaces. Integrated system self checkup makes putting into operation and service easier. For service purpose, the meter configuration can be kept or transferred to another meter without a new parametering via the optional back-up parameter function.

### APPLICATION

The M2000 transmitter can be integrally mounted to the sensor or can be remote-mounted, if necessary and has many advantages over other conventional technologies. The meter targets a variety of applications and is well suited for the diverse water and wastewater treatment industry. The M2000 meter can accurately measure fluid flow—whether the fluid is water or a highly corrosive liquid, very viscous, contains a moderate amount of solids, or requires special handling. Today, electromagnetic meters are successfully used in industries including building automation, oil and gas, food and beverage, pharmaceutical, water and wastewater, and chemical.

### STRAIGHT PIPE REQUIREMENTS

Run sufficient straight-pipe at the sensor inlet and outlet for optimum meter accuracy and performance. An equivalent of 3...7 diameters of straight pipe is required on the inlet (upstream) side to provide a stable flow profile. Two (2) diameters are required on the outlet (downstream) side.

In applications with limited space, the M2000 can be installed with zero straight pipe requirements and fulfils the accuracy according OIML R49 and MID Annex MI-001.



### FEATURES

- Available in sizes 0.25...78 in. (6...2000 mm)
- Accuracy of  $\pm 0.2\%$  of reading  $\pm 1$  mm/s
- Flow Range 0.03...12 m/s
- Pulsed DC magnetic field for zero point stability
- Integral and remote signal converter availability
- Power Supply of 100...240V AC / 12...32V DC
- Corrosion-resistant liners for long life
- Zero Straight Run (0 x DN) OIML/MID
- User friendly programming procedure
- Empty pipe detection
- Power loss totalization
- Digital signal processor (32-bit)
- Non-volatile programming memory
- LCD display
- Rotating cover
- IP67 Housing
- Calibrated in state-of-the-art facilities
- Modbus<sup>®</sup> RTU or Modbus TCP/IP, HART, M-Bus, EtherNet/IP, BACnet/IP, BACnet MS/TP (BTL certification), Profibus DP
- Integrated data logger
- Verifications device
- NSF/ANSI/CAN 61 and 372 listed
- CSA / AWWA C715 certified
- BEACON<sup>®</sup>/AquaCUE<sup>®</sup> connectivity

## ELECTRODES

When looking from the end of the meter into the inside bore, the two measuring electrodes are positioned at three o'clock and nine o'clock. M2000 electromagnetic meters have an "empty pipe detection" feature. This is accomplished with a third electrode positioned in the meter at twelve o'clock.

If this electrode is not covered by fluid for a minimum five-second duration, the meter displays an "empty pipe detection" condition, sends out an error message, if desired, and stops measuring to maintain accuracy. When the electrode again becomes covered with fluid, the error message disappears and the meter resumes measuring.

As an option to using grounding rings, a grounding electrode (fourth electrode) can be built into the meter during manufacturing to assure proper grounding. The position of this electrode is at six o'clock.

## OPERATION

The flow meter is a stainless steel tube lined with a non-conductive material. Outside the tube, two DC powered electromagnetic coils are positioned opposing each other. Perpendicular to these coils, two electrodes are inserted into the flow tube. Energized coils create a magnetic field across the whole diameter of the pipe.

As a conductive fluid flows through the magnetic field, a voltage is induced across the electrodes. This voltage is proportional to the average flow velocity of the fluid and is measured by the two electrodes. The M2000 transmitter receives the sensor's analog signal, amplifies that signal and converts it into digital information. At the processor level, the signal is analyzed through a series of sophisticated software algorithms. After separating the signal from electrical noise, it is converted into both analog and digital signals that are used to display rate of flow and totalization.

With no moving parts in the flow stream, there is no pressure lost. Also, accuracy is not affected by temperature, pressure, viscosity or density and there is practically no maintenance required.

## SPECIFICATIONS

**NOTE:** Permanently connected equipment requires the special considerations to satisfy the CEC and the Canadian deviations in the standard, including overcurrent and fault protection as required.


**NOTE:** DN represents nominal diameter in mm.

### Transmitter Specifications

|                             |   |
|-----------------------------|---|
| <b>Flow Range</b>           | 0.10...39.4 ft/s (0.03...12 m/s)  |
| <b>Accuracy</b>             | ± 0.20% m.v. ± 1 mm/s OIML/MID: 2...32 in. (DN50...800) with 0d up and 0d downstream ±1% ≥ 0.5 ft/s (0.15 m/s)  |
| <b>Repeatability</b>        | ± 0.1%  |
| <b>Power Supply</b>         | <b>AC Power Supply:</b> 100...240V AC (±10%); Typical Power: 20V A or 15W; Maximum Power: 26V A or 20W<br><b>Optional DC Power Supply:</b> 12...32V DC (±10%); Typical Power: 10W; Maximum Power: 14W   |
| <b>Analog Output</b>        | 4...20 mA, 0...20 mA, 0...10 mA, 2...10 mA (programmable and scalable)<br>Voltage sourced 24V DC isolated. Maximum loop resistance < 800 Ohms.  |
| <b>Digital Output</b>       | Four total, configurable 24V DC sourcing active output (up to 2), 100 mA total, 50 mA each; sinking open collector output (up to four), 30V DC max, 100 mA each; solid-state relay (up to 2), 48V DC, 500 mA max, either polarity<br>Absolute Digital Encoded output for connectivity to AquaCUE or BEACON cellular endpoints |
| <b>Digital Input</b>        | Max 30V DC (programmable – positive zero return, external totalizer reset or preset batch start)  |
| <b>Frequency Output</b>     | Scalable up to 10 kHz, open collector up to 1 kHz, solid-state relay  |
| <b>Misc Output</b>          | High/low flow alarm (0...100% of flow), error alarm, empty pipe alarm, flow direction, preset batch alarm, 24V DC supply, ADE   |
| <b>Communication</b>        | RS232 Modbus RTU; RS485 Modbus RTU, HART, Profibus DP, BACnet MS/TP, Modbus TCP/IP, EtherNet/IP and BACnet/IP require separate daughterboards   |
| <b>Pulse Width</b>          | Scalable up to 10 kHz, passive open collector up to 10 kHz, active switched 24V DC. Up to two outputs (forward and reverse). Pulse width programmable from 1...1000 ms or 50% duty cycle.   |
| <b>Processing</b>           | 32-bit DSP  |
| <b>Empty Pipe Detection</b> | Field tunable for optimum performance based on specific application   |
| <b>Excitation Frequency</b> | 1 Hz, 3.75 Hz, 7.5 Hz or 15 Hz (factory optimized to pipe diameter)   |
| <b>Noise Dampening</b>      | Programmable 0...30 seconds   |
| <b>Low Flow Cut-Off</b>     | Programmable 0...10% of maximum flow  |
| <b>Galvanic Separation</b>  | 250V  |
| <b>Fluid Conductivity</b>   | Minimum 5.0 µS/cm (minimum 20 µS/cm for demineralized water)  |
| <b>Fluid Temperature</b>    | <b>With Remote Transmitter:</b> PFA, PTFE & ETFE 302° F (150° C)<br><b>With Meter-Mounted Transmitter:</b> Rubber 178° F, (80° C), PFA, PTFE & ETFE 212° F (100° C)   |
| <b>Ambient Temperature</b>  | - 4...140° F (-20...60° C)  |
| <b>Relative Humidity</b>    | Up to 90 percent non-condensing   |

|  |  |                              |  |
|--|--|------------------------------|--|
| <b>Pollution Degree</b>                              | 2  |                              |  |
| <b>Installation Category</b>                         | II   |                              |  |
| <b>Altitude</b>                                      | 8202 ft (2500 m)   |                              |  |
| <b>Flow Direction</b>                                | Unidirectional or bidirectional two separate totalizers (programmable)   |                              |  |
| <b>Totalization</b>                                  | Programmable/resettable  |                              |  |
| <b>Units of Measure</b>                              | Ounce, pound, liter, US gallon, imperial gallon, barrel, hectoliter, mega gallon, cubic meter, cubic feet, acre feet   |                              |  |
| <b>Display</b>                                       | 4 x 20 character display with backlight  |                              |  |
| <b>Programming</b>                                   | Three-button, external manual or remote  |                              |  |
| <b>Transmitter Housing</b>                           | Cast aluminum, powder-coated paint   |                              |  |
| <b>Mounting</b>                                      | Meter mount or remote wall mount (bracket supplied)  |                              |  |
| <b>Locations</b>                                     | Indoor and outdoor   |                              |  |
| <b>Meter Enclosure Classification</b>                | <b>Standard:</b> NEMA 4X (IP67); <b>Optional:</b> Submersible NEMA 6P (IP68) depth of 2 m for 72 hr, remote transmitter required   |                              |  |
| <b>Junction Box Enclosure Protection</b>             | For remote transmitter option: powder-coated die-cast aluminum, NEMA 4 (IP67)  |                              |  |
| <b>Cable Entries</b>                                 | M20 cable glands (3)   |                              |  |
| <b>Optional Stainless Steel Grounding Rings</b>      | <b>Meter Size</b>  | <b>Thickness of one ring</b> | <b>Thickness of one ring (DIN Flanges)</b> |
|  | Up through 10 in.  | 0.135 in. (3.429 mm)         | 0.12 in. (3 mm)                            |
|  | 12...78 in.  | 0.187 in. (4.750 mm)         | 0.12 in. (3 mm)                            |
| <b>NSF/ANSI/CAN 61 and 372 Listed WRAS, ACS, KTW</b> | Models with hard rubber liner, 4 in. size and larger; PTFE liner, all sizes<br>WRAS (hard rubber), ACS (PTFE), KTW (PTFE)  |                              |  |
| <b>OIML R49-1 MID MI-001 AWWA C715 MCERT</b>         | Size range: DN50...800 / 2...28 in.<br>Minimum straight inlet flow: 0 DN /outlet flow: 0 DN<br>Forward and reverse (bi-directional) flow on any orientation<br>Ratio (Q3/Q1) up to 250<br>Accuracy Class 1 and Class 2 |                              |  |
| <b>Token Features</b>                                | Data Logging (Blue token); Store/Restore (Red token); Firmware Upgrade (Black token)   |                              |  |

**M2000 Transmitter Dimensions**  
in. (mm)

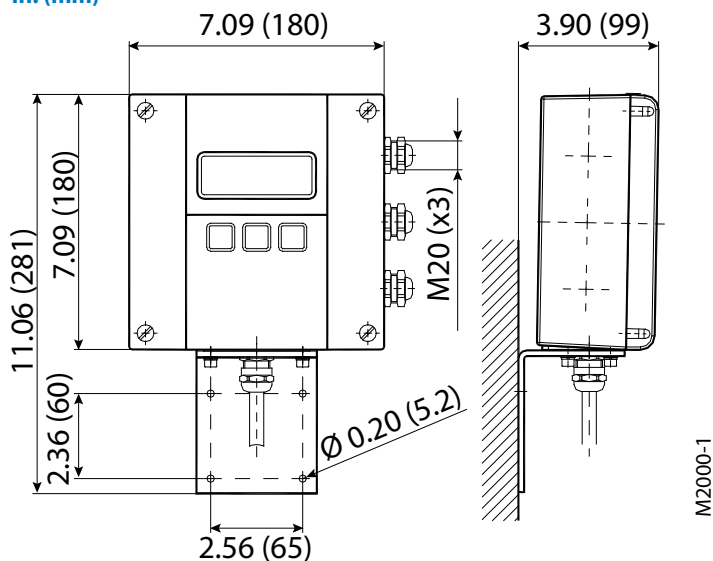


### Sensor Type II Specifications

The electromagnetic sensor type II is not only available in a number of different flange process connections (DIN, ANSI, JIS, AWWA) but also in a number of liners like hard rubber, PTFE, PFA or ETFE. The sensor is configurable with up to 4 electrodes for measuring, empty pipe and grounding electrodes. Available in sizes from DN 6 TO DN 2000 and nominal pressures up to PN 100, the sensor type II is best suited for a variety of applications in the industry and the water/waste water industry.


|                             |  |   |
|-----------------------------|--|---|
| <b>Size</b>                 | 1/4...78 in. (DN 6...2000)   |   |
| <b>Flanges</b>              | <b>Standard:</b> ANSI B16.5, AWWA, ISO 1092-1, JIS and more in carbon steel; <b>Optional:</b> 304 or 316 stainless steel   |   |
| <b>Nominal Pressure</b>     | Up to 1450 psi (100 bar)   |   |
| <b>Pressure Rating</b>      | Line sizes 1/4...24 in: In accordance with ASME B16.5 Class 150 or Flange Rating Class 300<br>Line sizes 26...78 in: AWWA C-207 Class D or Class E Flange Rating |   |
| <b>Protection Class</b>     | NEMA 4X (IP67), optional NEMA 6P (IP68)  |   |
| <b>Minimum Conductivity</b> | 5 µS/cm (20 µS/cm for demineralized water)   |   |
| <b>Liner Material</b>       | Hard rubber  | 1...78 in. (DN 25...2000)<br>32...176° F (0...80° C)      |
|                             | PTFE   | 1/2...24 in. (DN 15...600)<br>-40...302° F (-40...150° C) |
|                             | ETFE   | 12 in. (DN 300) and larger<br>-40...302° F (-40...150° C) |
|                             | PFA  | 1/4...3/8 in. (DN 6...10)<br>—                            |
| <b>Housing</b>              | <b>Standard:</b> Carbon steel welded; <b>Optional:</b> 316 or 304 stainless steel  |   |
| <b>Electrode Materials</b>  | <b>Standard:</b> Hastelloy C22; <b>Optional:</b> 316 stainless steel, gold/platinum plated, tantalum, platinum/rhodium   |   |
| <b>Lay Length</b>           | 1/4...3/4 in. (DN 6...20)  | 6.7 in. (170 mm)  |
|                             | 1...2 in. (DN 25...50)   | 8.9 in. (225 mm)  |
|                             | 2-1/2...4 in. (DN 65...100)  | 11.0 in. (280 mm)   |
|                             | 5...8 in. (DN 125...200)   | 15.8 in. (400 mm)   |
|                             | 10...14 in. (DN 250...350)   | 19.7 in. (500 mm)   |
|                             | 16...28 in. (DN 400...700)   | 23.6 in. (600 mm)   |
|                             | 30...40 in. (DN 750...1000)  | 31.5 in. (800 mm)   |
|                             | 48...56 in. (DN 1200...1400)   | 39.4 in. (1000 mm)  |
|                             | 64 in. (DN 1600)   | 63.0 in. (1600 mm)  |
|                             | 72 in. (DN 1800)   | 70.9 in. (1800 mm)  |
| 78 in. (DN 2000)            | 78.7 in. (2000 mm)   |   |

### Sensor Type II Dimensions

#### Remote Version in. (mm)

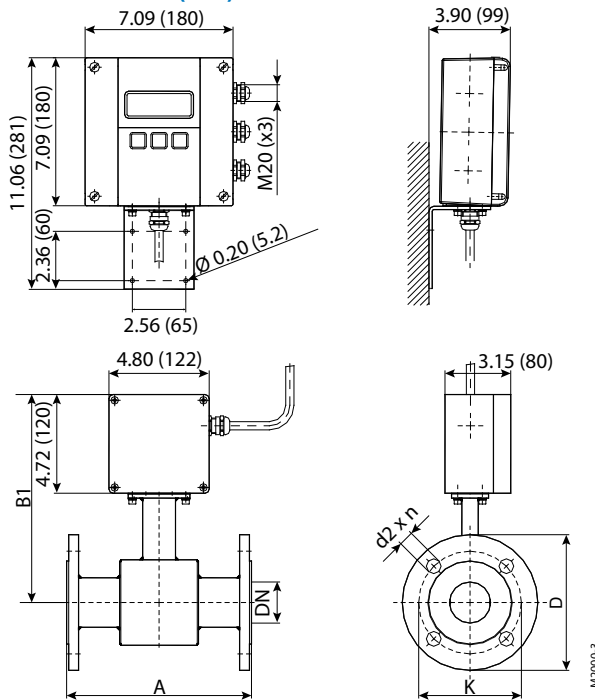

#### Mounted Version in. (mm)

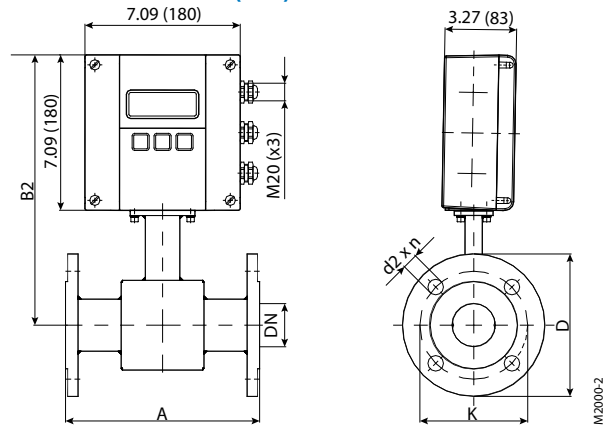

**IMPORTANT:** Flange Sizes ≤ 24 in., Standard: ANSI B16.5 Class 150 RF forged carbon steel; Optional: 300 lb forged carbon steel, 316 or 304 stainless steel

Flange Sizes > 24 in., Standard: AWWA Class D Flanges RF forged carbon steel

## Flange ANSI Class 150 Up to 24 in. ASME B16.5 / > 24 in. AWWA Class D (ASME 16.47)

| Size DN |      | A Standard |      | A ISO* |      | B1   |      | B2   |      | D    |      | K    |      | d2 x n   |         |
|---------|------|------------|------|--------|------|------|------|------|------|------|------|------|------|----------|---------|
| inch    | mm   | inch       | mm   | inch   | mm   | inch | mm   | inch | mm   | inch | mm   | inch | mm   | inch     | mm      |
| 1/4     | 6    | 6.7        | 170  | —      | —    | 9.0  | 228  | 11.3 | 288  | 3.5  | 89   | 2.4  | 61   | 0.6 x 4  | 16 x 4  |
| 5/16    | 8    | 6.7        | 170  | —      | —    | 9.0  | 228  | 11.3 | 288  | 3.5  | 89   | 2.4  | 61   | 0.6 x 4  | 16 x 4  |
| 3/8     | 10   | 6.7        | 170  | —      | —    | 9.0  | 228  | 11.3 | 288  | 3.5  | 89   | 2.4  | 61   | 0.6 x 4  | 16 x 4  |
| 1/2     | 15   | 6.7        | 170  | 7.9    | 200  | 9.4  | 238  | 11.7 | 298  | 3.5  | 89   | 2.4  | 61   | 0.6 x 4  | 16 x 4  |
| 3/4     | 20   | 6.7        | 170  | 7.9    | 200  | 9.4  | 238  | 11.7 | 298  | 3.9  | 99   | 2.8  | 71   | 0.6 x 4  | 16 x 4  |
| 1       | 25   | 8.9        | 225  | 7.9    | 200  | 9.4  | 238  | 11.7 | 298  | 4.3  | 109  | 3.1  | 79   | 0.6 x 4  | 16 x 4  |
| 1-1/4   | 32   | 8.9        | 225  | 7.9    | 200  | 10.0 | 253  | 12.3 | 313  | 4.6  | 117  | 3.5  | 89   | 0.6 x 4  | 16 x 4  |
| 1-1/2   | 40   | 8.9        | 225  | 7.9    | 200  | 10.0 | 253  | 12.3 | 313  | 5.0  | 127  | 3.9  | 99   | 0.6 x 4  | 16 x 4  |
| 2       | 50   | 8.9        | 225  | 7.9    | 200  | 10.0 | 253  | 12.3 | 313  | 6.0  | 152  | 4.8  | 122  | 0.8 x 4  | 19 x 4  |
| 2-1/2   | 65   | 11.0       | 280  | 7.9    | 200  | 10.7 | 271  | 13.0 | 331  | 7.0  | 178  | 5.5  | 140  | 0.8 x 4  | 19 x 4  |
| 3       | 80   | 11.0       | 280  | 7.9    | 200  | 10.7 | 271  | 13.0 | 331  | 7.5  | 191  | 6.0  | 152  | 0.8 x 4  | 19 x 4  |
| 4       | 100  | 11.0       | 280  | 9.8    | 250  | 10.9 | 278  | 13.3 | 338  | 9.0  | 229  | 7.5  | 191  | 0.8 x 8  | 19 x 8  |
| 5       | 125  | 15.7       | 400  | 9.8    | 250  | 11.7 | 298  | 14.1 | 358  | 10.0 | 254  | 8.5  | 216  | 0.9 x 8  | 22 x 8  |
| 6       | 150  | 15.7       | 400  | 11.8   | 300  | 12.2 | 310  | 14.6 | 370  | 11.0 | 279  | 9.5  | 241  | 0.9 x 8  | 22 x 8  |
| 8       | 200  | 15.7       | 400  | 13.8   | 350  | 13.3 | 338  | 15.7 | 398  | 13.5 | 343  | 11.8 | 300  | 0.9 x 8  | 22 x 8  |
| 10      | 250  | 19.7       | 500  | 17.7   | 450  | 14.3 | 362  | 16.6 | 422  | 16.0 | 406  | 14.3 | 363  | 1.0 x 12 | 25 x 12 |
| 12      | 300  | 19.7       | 500  | 19.7   | 500  | 16.7 | 425  | 19.1 | 485  | 19.0 | 483  | 17.0 | 432  | 1.0 x 12 | 25 x 12 |
| 14      | 350  | 19.7       | 500  | 21.7   | 550  | 17.7 | 450  | 20.1 | 510  | 21.0 | 533  | 18.8 | 478  | 1.1 x 12 | 28 x 12 |
| 16      | 400  | 23.6       | 600  | 23.6   | 600  | 18.7 | 475  | 21.1 | 535  | 23.5 | 597  | 21.3 | 541  | 1.1 x 16 | 28 x 16 |
| 18      | 450  | 23.6       | 600  | 23.6   | 600  | 19.7 | 500  | 22.0 | 560  | 25.0 | 635  | 22.8 | 579  | 1.3 x 16 | 32 x 16 |
| 20      | 500  | 23.6       | 600  | 23.6   | 600  | 20.7 | 525  | 23.0 | 585  | 27.5 | 699  | 25.0 | 635  | 1.3 x 20 | 32 x 20 |
| 24      | 600  | 23.6       | 600  | 23.6   | 600  | 23.1 | 588  | 25.5 | 648  | 32.0 | 813  | 29.5 | 749  | 1.4 x 20 | 35 x 20 |
| 28      | 700  | 23.6       | 600  | 27.6   | 700  | 24.6 | 625  | 27.0 | 685  | 36.5 | 927  | 34.0 | 864  | 1.4 x 28 | 35 x 28 |
| 30      | 750  | 31.5       | 800  | 29.5   | 750  | 25.6 | 650  | 28.0 | 710  | 38.8 | 986  | 36.0 | 914  | 1.4 x 28 | 35 x 28 |
| 32      | 800  | 31.5       | 800  | 31.5   | 800  | 26.9 | 683  | 29.3 | 743  | 41.8 | 1062 | 38.5 | 978  | 1.6 x 28 | 41 x 28 |
| 36      | 900  | 31.5       | 800  | 35.4   | 900  | 28.5 | 725  | 30.9 | 785  | 46.0 | 1168 | 42.8 | 1087 | 1.6 x 32 | 41 x 32 |
| 40      | 1000 | 31.5       | 800  | 39.4   | 1000 | 31.1 | 790  | 33.5 | 850  | 50.8 | 1290 | 47.3 | 1201 | 1.6 x 36 | 41 x 36 |
| 42      | 1050 | 39.4       | 1000 | 41.3   | 1050 | 32.5 | 825  | 34.8 | 885  | 53.0 | 1346 | 49.5 | 1257 | 1.6 x 36 | 41 x 36 |
| 48      | 1200 | 39.4       | 1000 | 47.2   | 1200 | 35.4 | 900  | 37.8 | 960  | 59.5 | 1511 | 56.0 | 1422 | 1.6 x 44 | 41 x 44 |
| 54      | 1350 | 39.4       | 1000 | 53.1   | 1350 | 38.4 | 975  | 40.7 | 1035 | 66.3 | 1684 | 62.8 | 1595 | 1.9 x 44 | 48 x 44 |
| 56      | 1400 | 39.4       | 1000 | 55.1   | 1400 | 39.4 | 1000 | 41.7 | 1060 | 68.8 | 1748 | 65.0 | 1651 | 1.9 x 48 | 48 x 48 |

Other sizes on request

**IMPORTANT:** ISO\* sensor lay length according to ISO 20456

## Flange ANSI Class 300 ASME B16.5

| Size DN |     | A Standard |     | A ISO* |     | B1   |     | B2   |     | D    |     | K    |     | d2 x n   |         |
|---------|-----|------------|-----|--------|-----|------|-----|------|-----|------|-----|------|-----|----------|---------|
| inch    | mm  | inch       | mm  | inch   | mm  | inch | mm  | inch | mm  | inch | mm  | inch | mm  | inch     | mm      |
| 1/2     | 15  | 6.7        | 170 | 7.9    | 200 | 9.4  | 238 | 11.7 | 298 | 3.8  | 95  | 2.6  | 67  | 0.6 x 4  | 16 x 4  |
| 3/4     | 20  | 6.7        | 170 | 7.9    | 200 | 9.4  | 238 | 11.7 | 298 | 4.6  | 117 | 3.3  | 83  | 0.8 x 4  | 19 x 4  |
| 1       | 25  | 8.9        | 225 | 7.9    | 200 | 9.4  | 238 | 11.7 | 298 | 4.9  | 124 | 3.5  | 89  | 0.8 x 4  | 19 x 4  |
| 1-1/4   | 32  | 8.9        | 225 | 7.9    | 200 | 10.0 | 253 | 12.3 | 313 | 5.3  | 133 | 3.9  | 99  | 0.8 x 4  | 19 x 4  |
| 1-1/2   | 40  | 8.9        | 225 | 7.9    | 200 | 10.0 | 253 | 12.3 | 313 | 6.1  | 155 | 4.5  | 114 | 0.9 x 4  | 22 x 4  |
| 2       | 50  | 8.9        | 225 | 7.9    | 200 | 10.0 | 253 | 12.3 | 313 | 6.5  | 165 | 5.0  | 127 | 0.8 x 8  | 19 x 8  |
| 2-1/2   | 65  | 11.0       | 280 | 7.9    | 200 | 10.7 | 271 | 13.0 | 331 | 7.5  | 191 | 5.9  | 149 | 0.9 x 8  | 22 x 8  |
| 3       | 80  | 11.0       | 280 | 7.9    | 200 | 10.7 | 271 | 13.0 | 331 | 8.3  | 210 | 6.6  | 168 | 0.9 x 8  | 22 x 8  |
| 4       | 100 | 11.0       | 280 | 9.8    | 250 | 10.9 | 278 | 13.3 | 338 | 10.0 | 254 | 7.9  | 200 | 0.9 x 8  | 22 x 8  |
| 5       | 125 | 15.7       | 400 | 9.8    | 250 | 11.7 | 298 | 14.1 | 358 | 11.0 | 279 | 9.3  | 235 | 0.9 x 8  | 22 x 8  |
| 6       | 150 | 15.7       | 400 | 11.8   | 300 | 12.2 | 310 | 14.6 | 370 | 12.5 | 318 | 10.6 | 270 | 0.9 x 12 | 22 x 12 |
| 8       | 200 | 15.7       | 400 | 13.8   | 350 | 13.3 | 338 | 15.7 | 398 | 15.0 | 381 | 13.0 | 330 | 1.0 x 12 | 25 x 12 |
| 10      | 250 | 19.7       | 500 | 17.7   | 450 | 14.3 | 362 | 16.6 | 422 | 17.5 | 445 | 15.3 | 387 | 1.1 x 16 | 28 x 16 |
| 12      | 300 | 19.7       | 500 | 19.7   | 500 | 16.7 | 425 | 19.1 | 485 | 20.5 | 521 | 17.8 | 451 | 1.3 x 16 | 32 x 16 |
| 14      | 350 | 19.7       | 500 | 21.7   | 550 | 17.7 | 450 | 20.1 | 510 | 23.0 | 584 | 20.3 | 514 | 1.3 x 20 | 32 x 20 |
| 16      | 400 | 23.6       | 600 | 23.6   | 600 | 18.7 | 475 | 21.1 | 535 | 25.5 | 648 | 22.5 | 572 | 1.4 x 20 | 35 x 20 |
| 18      | 450 | 23.6       | 600 | 23.6   | 600 | 19.7 | 500 | 22.0 | 560 | 28.0 | 711 | 24.8 | 629 | 1.4 x 24 | 35 x 24 |
| 20      | 500 | 23.6       | 600 | 23.6   | 600 | 20.7 | 525 | 23.0 | 585 | 30.5 | 775 | 27.0 | 686 | 1.4 x 24 | 35 x 24 |
| 24      | 600 | 23.6       | 600 | 23.6   | 600 | 23.1 | 588 | 25.5 | 648 | 36.0 | 914 | 32.0 | 813 | 1.6 x 24 | 41 x 24 |

Other sizes on request

**IMPORTANT:** ISO\* sensor lay length according to ISO 20456

**Flange EN 1092-1 / PN 10**

| Size DN |      | A Standard |      | A ISO* |      | B1   |      | B2   |      | D    |      | K    |      | d2 x n   |         |
|---------|------|------------|------|--------|------|------|------|------|------|------|------|------|------|----------|---------|
| inch    | mm   | inch       | mm   | inch   | mm   | inch | mm   | inch | mm   | inch | mm   | inch | mm   | inch     | mm      |
| 8       | 200  | 15.7       | 400  | 13.8   | 350  | 13.3 | 338  | 15.7 | 398  | 13.4 | 340  | 11.6 | 295  | 0.9 x 8  | 22 x 8  |
| 10      | 250  | 19.7       | 500  | 17.7   | 450  | 14.3 | 362  | 16.6 | 422  | 15.6 | 395  | 13.8 | 350  | 0.9 x 12 | 22 x 12 |
| 12      | 300  | 19.7       | 500  | 19.7   | 500  | 16.7 | 425  | 19.1 | 485  | 17.5 | 445  | 15.7 | 400  | 0.9 x 12 | 22 x 12 |
| 14      | 350  | 19.7       | 500  | 21.7   | 550  | 17.7 | 450  | 20.1 | 510  | 19.9 | 505  | 18.1 | 460  | 0.9 x 16 | 22 x 16 |
| 16      | 400  | 23.6       | 600  | 23.6   | 600  | 18.7 | 475  | 21.1 | 535  | 22.2 | 565  | 20.3 | 515  | 1.0 x 16 | 26 x 16 |
| 18      | 450  | 23.6       | 600  | 23.6   | 600  | 19.7 | 500  | 22.0 | 560  | 24.2 | 615  | 22.2 | 565  | 1.0 x 20 | 26 x 20 |
| 20      | 500  | 23.6       | 600  | 23.6   | 600  | 20.7 | 525  | 23.0 | 585  | 26.4 | 670  | 24.4 | 620  | 1.0 x 20 | 26 x 20 |
| 24      | 600  | 23.6       | 600  | 23.6   | 600  | 23.1 | 588  | 25.5 | 648  | 30.7 | 780  | 28.5 | 725  | 1.2 x 20 | 30 x 20 |
| 28      | 700  | 23.6       | 600  | 27.6   | 700  | 24.6 | 625  | 27.0 | 685  | 35.2 | 895  | 33.1 | 840  | 1.2 x 24 | 30 x 24 |
| 32      | 800  | 31.5       | 800  | 31.5   | 800  | 26.9 | 683  | 29.3 | 743  | 40.0 | 1015 | 37.4 | 950  | 1.3 x 24 | 33 x 24 |
| 36      | 900  | 31.5       | 800  | 35.4   | 900  | 28.5 | 725  | 30.9 | 785  | 43.9 | 1115 | 41.3 | 1050 | 1.3 x 28 | 33 x 28 |
| 40      | 1000 | 31.5       | 800  | 39.4   | 1000 | 31.1 | 790  | 33.5 | 850  | 48.4 | 1230 | 45.7 | 1160 | 1.4 x 28 | 36 x 28 |
| 48      | 1200 | 39.4       | 1000 | 47.2   | 1200 | 35.4 | 900  | 37.8 | 960  | 57.3 | 1455 | 54.3 | 1380 | 1.5 x 32 | 39 x 32 |
| 56      | 1400 | 39.4       | 1000 | 55.1   | 1400 | 39.4 | 1000 | 41.7 | 1060 | 65.9 | 1675 | 62.6 | 1590 | 1.7 x 36 | 42 x 36 |

Other sizes on request

**IMPORTANT:** ISO\* sensor lay length according to ISO 20456

**Flange EN 1092-1 / PN 16**

| Size DN |      | A Standard |      | A ISO* |      | B1   |      | B2   |      | D    |      | K    |      | d2 x n   |         |
|---------|------|------------|------|--------|------|------|------|------|------|------|------|------|------|----------|---------|
| inch    | mm   | inch       | mm   | inch   | mm   | inch | mm   | inch | mm   | inch | mm   | inch | mm   | inch     | mm      |
| 1/4     | 6    | 6.7        | 170  | —      | —    | 9.0  | 228  | 11.3 | 288  | 3.5  | 90   | 2.4  | 60   | 0.6 x 4  | 14 x 4  |
| 5/16    | 8    | 6.7        | 170  | —      | —    | 9.0  | 228  | 11.3 | 288  | 3.5  | 90   | 2.4  | 60   | 0.6 x 4  | 14 x 4  |
| 3/8     | 10   | 6.7        | 170  | —      | —    | 9.0  | 228  | 11.3 | 288  | 3.5  | 90   | 2.4  | 60   | 0.6 x 4  | 14 x 4  |
| 1/2     | 15   | 6.7        | 170  | 7.9    | 200  | 9.4  | 238  | 11.7 | 298  | 3.7  | 95   | 2.6  | 65   | 0.6 x 4  | 14 x 4  |
| 3/4     | 20   | 6.7        | 170  | 7.9    | 200  | 9.4  | 238  | 11.7 | 298  | 4.1  | 105  | 3.0  | 75   | 0.6 x 4  | 14 x 4  |
| 1       | 25   | 8.9        | 225  | 7.9    | 200  | 9.4  | 238  | 11.7 | 298  | 4.5  | 115  | 3.3  | 85   | 0.6 x 4  | 14 x 4  |
| 1-1/4   | 32   | 8.9        | 225  | 7.9    | 200  | 10.0 | 253  | 12.3 | 313  | 5.5  | 140  | 3.9  | 100  | 0.7 x 4  | 18 x 4  |
| 1-1/2   | 40   | 8.9        | 225  | 7.9    | 200  | 10.0 | 253  | 12.3 | 313  | 5.9  | 150  | 4.3  | 110  | 0.7 x 4  | 18 x 4  |
| 2       | 50   | 8.9        | 225  | 7.9    | 200  | 10.0 | 253  | 12.3 | 313  | 6.5  | 165  | 4.9  | 125  | 0.7 x 4  | 18 x 4  |
| 2-1/2   | 65   | 11.0       | 280  | 7.9    | 200  | 10.7 | 271  | 13.0 | 331  | 7.3  | 185  | 5.7  | 145  | 0.7 x 8  | 18 x 8  |
| 3       | 80   | 11.0       | 280  | 7.9    | 200  | 10.7 | 271  | 13.0 | 331  | 7.9  | 200  | 6.3  | 160  | 0.7 x 8  | 18 x 8  |
| 4       | 100  | 11.0       | 280  | 9.8    | 250  | 10.9 | 278  | 13.3 | 338  | 8.7  | 220  | 7.1  | 180  | 0.7 x 8  | 18 x 8  |
| 5       | 125  | 15.7       | 400  | 9.8    | 250  | 11.7 | 298  | 14.1 | 358  | 9.8  | 250  | 8.3  | 210  | 0.7 x 8  | 18 x 8  |
| 6       | 150  | 15.7       | 400  | 11.8   | 300  | 12.2 | 310  | 14.6 | 370  | 11.2 | 285  | 9.4  | 240  | 0.9 x 8  | 22 x 8  |
| 8       | 200  | 15.7       | 400  | 13.8   | 350  | 13.3 | 338  | 15.7 | 398  | 13.4 | 340  | 11.6 | 295  | 0.9 x 12 | 22 x 12 |
| 10      | 250  | 19.7       | 500  | 17.7   | 450  | 14.3 | 362  | 16.6 | 422  | 15.9 | 405  | 14.0 | 355  | 1.0 x 12 | 26 x 12 |
| 12      | 300  | 19.7       | 500  | 19.7   | 500  | 16.7 | 425  | 19.1 | 485  | 18.1 | 460  | 16.1 | 410  | 1.0 x 12 | 26 x 12 |
| 14      | 350  | 19.7       | 500  | 21.7   | 550  | 17.7 | 450  | 20.1 | 510  | 20.5 | 520  | 18.5 | 470  | 1.0 x 16 | 26 x 16 |
| 16      | 400  | 23.6       | 600  | 23.6   | 600  | 18.7 | 475  | 21.1 | 535  | 22.8 | 580  | 20.7 | 525  | 1.2 x 16 | 30 x 16 |
| 18      | 450  | 23.6       | 600  | 23.6   | 600  | 19.7 | 500  | 22.0 | 560  | 25.2 | 640  | 23.0 | 585  | 1.2 x 20 | 30 x 20 |
| 20      | 500  | 23.6       | 600  | 23.6   | 600  | 20.7 | 525  | 23.0 | 585  | 28.1 | 715  | 25.6 | 650  | 1.3 x 20 | 33 x 20 |
| 24      | 600  | 23.6       | 600  | 23.6   | 600  | 23.1 | 588  | 25.5 | 648  | 33.1 | 840  | 30.3 | 770  | 1.4 x 20 | 36 x 20 |
| 28      | 700  | 23.6       | 600  | 27.6   | 700  | 24.6 | 625  | 27.0 | 685  | 35.8 | 910  | 33.1 | 840  | 1.4 x 24 | 36 x 24 |
| 32      | 800  | 31.5       | 800  | 31.5   | 800  | 26.9 | 683  | 29.3 | 743  | 40.4 | 1025 | 37.4 | 950  | 1.5 x 24 | 39 x 24 |
| 36      | 900  | 31.5       | 800  | 35.4   | 900  | 28.5 | 725  | 30.9 | 785  | 44.3 | 1125 | 41.3 | 1050 | 1.5 x 28 | 39 x 28 |
| 40      | 1000 | 31.5       | 800  | 39.4   | 1000 | 31.1 | 790  | 33.5 | 850  | 49.4 | 1255 | 46.1 | 1170 | 1.7 x 28 | 42 x 28 |
| 48      | 1200 | 39.4       | 1000 | 47.2   | 1200 | 35.4 | 900  | 37.8 | 960  | 58.5 | 1485 | 54.7 | 1390 | 1.9 x 32 | 48 x 32 |
| 56      | 1400 | 39.4       | 1000 | 55.1   | 1400 | 39.4 | 1000 | 41.7 | 1060 | 66.3 | 1685 | 62.6 | 1590 | 1.9 x 36 | 48 x 36 |

Other sizes on request

**IMPORTANT:** ISO\* sensor lay length according to ISO 20456

## Flange EN 1092-1 / PN 25

| Size DN |      | A Standard |     | A ISO* |      | B1   |     | B2   |     | D    |      | K    |      | d2 x n   |         |
|---------|------|------------|-----|--------|------|------|-----|------|-----|------|------|------|------|----------|---------|
| inch    | mm   | inch       | mm  | inch   | mm   | inch | mm  | inch | mm  | inch | mm   | inch | mm   | inch     | mm      |
| 1/2     | 15   | 6.7        | 170 | 7.9    | 200  | 9.4  | 238 | 11.7 | 298 | 3.7  | 95   | 2.6  | 65   | 0.6 x 4  | 14 x 4  |
| 3/4     | 20   | 6.7        | 170 | 7.9    | 200  | 9.4  | 238 | 11.7 | 298 | 4.1  | 105  | 3.0  | 75   | 0.6 x 4  | 14 x 4  |
| 1       | 25   | 8.9        | 225 | 7.9    | 200  | 9.4  | 238 | 11.7 | 298 | 4.5  | 115  | 3.3  | 85   | 0.6 x 4  | 14 x 4  |
| 1-1/4   | 32   | 8.9        | 225 | 7.9    | 200  | 10.0 | 253 | 12.3 | 313 | 5.5  | 140  | 3.9  | 100  | 0.7 x 4  | 18 x 4  |
| 1-1/2   | 40   | 8.9        | 225 | 7.9    | 200  | 10.0 | 253 | 12.3 | 313 | 5.9  | 150  | 4.3  | 110  | 0.7 x 4  | 18 x 4  |
| 2       | 50   | 8.9        | 225 | 7.9    | 200  | 10.0 | 253 | 12.3 | 313 | 6.5  | 165  | 4.9  | 125  | 0.7 x 4  | 18 x 4  |
| 2-1/2   | 65   | 11.0       | 280 | 7.9    | 200  | 10.7 | 271 | 13.0 | 331 | 7.3  | 185  | 5.7  | 145  | 0.7 x 4  | 18 x 8  |
| 3       | 80   | 11.0       | 280 | 7.9    | 200  | 10.7 | 271 | 13.0 | 331 | 7.9  | 200  | 6.3  | 160  | 0.7 x 8  | 18 x 8  |
| 4       | 100  | 11.0       | 280 | 9.8    | 250  | 10.9 | 278 | 13.3 | 338 | 9.3  | 235  | 7.5  | 190  | 0.9 x 8  | 22 x 8  |
| 5       | 125  | 15.7       | 400 | 9.8    | 250  | 11.7 | 298 | 14.1 | 358 | 10.6 | 270  | 8.7  | 220  | 1.0 x 8  | 26 x 8  |
| 6       | 150  | 15.7       | 400 | 11.8   | 300  | 12.2 | 310 | 14.6 | 370 | 11.8 | 300  | 9.8  | 250  | 1.0 x 8  | 26 x 8  |
| 8       | 200  | 15.7       | 400 | 13.8   | 350  | 13.3 | 338 | 15.7 | 398 | 14.2 | 360  | 12.2 | 310  | 1.0 x 8  | 26 x 12 |
| 10      | 250  | 19.7       | 500 | 17.7   | 450  | 14.3 | 362 | 16.6 | 422 | 16.7 | 425  | 14.6 | 370  | 1.2 x 12 | 30 x 12 |
| 12      | 300  | 19.7       | 500 | 19.7   | 500  | 16.7 | 425 | 19.1 | 485 | 19.1 | 485  | 16.9 | 430  | 1.2 x 12 | 30 x 16 |
| 14      | 350  | 19.7       | 500 | 21.7   | 550  | 17.7 | 450 | 20.1 | 510 | 21.9 | 555  | 19.3 | 490  | 1.3 x 16 | 33 x 16 |
| 16      | 400  | 23.6       | 600 | 23.6   | 600  | 18.7 | 475 | 21.1 | 535 | 24.4 | 620  | 21.7 | 550  | 1.4 x 16 | 36 x 16 |
| 18      | 450  | 23.6       | 600 | 23.6   | 600  | 19.7 | 500 | 22.0 | 560 | 26.4 | 670  | 23.6 | 600  | 1.4 x 20 | 36 x 20 |
| 20      | 500  | 23.6       | 600 | 23.6   | 600  | 20.7 | 525 | 23.0 | 585 | 28.7 | 730  | 26.0 | 660  | 1.4 x 20 | 36 x 20 |
| 24      | 600  | 23.6       | 600 | 23.6   | 600  | 23.1 | 588 | 25.5 | 648 | 33.3 | 845  | 30.3 | 770  | 1.5 x 20 | 39 x 20 |
| 28      | 700  | 23.6       | 600 | 27.6   | 700  | 24.6 | 625 | 27.0 | 685 | 37.8 | 960  | 34.4 | 875  | 1.7 x 24 | 42 x 24 |
| 32      | 800  | 31.5       | 800 | 31.5   | 800  | 26.9 | 683 | 29.3 | 743 | 42.7 | 1085 | 39.0 | 990  | 1.9 x 24 | 48 x 24 |
| 36      | 900  | 31.5       | 800 | 35.4   | 900  | 28.5 | 725 | 30.9 | 785 | 46.7 | 1185 | 42.9 | 1090 | 1.9 x 28 | 48 x 28 |
| 40      | 1000 | 31.5       | 800 | 39.4   | 1000 | 31.1 | 790 | 33.5 | 850 | 52.0 | 1320 | 47.6 | 1210 | 2.2 x 28 | 56 x 28 |

Other sizes on request

**IMPORTANT:** ISO\* sensor lay length according to ISO 20456

## Flange EN 1092-1 / PN 40

| Size DN |     | A Standard |     | A ISO* |     | B1   |     | B2   |     | D    |     | K    |     | d2 x n   |         |
|---------|-----|------------|-----|--------|-----|------|-----|------|-----|------|-----|------|-----|----------|---------|
| inch    | mm  | inch       | mm  | inch   | mm  | inch | mm  | inch | mm  | inch | mm  | inch | mm  | inch     | mm      |
| 1/2     | 15  | 6.7        | 170 | 7.9    | 200 | 9.4  | 238 | 11.7 | 298 | 3.7  | 95  | 2.6  | 65  | 0.6 x 4  | 14 x 4  |
| 3/4     | 20  | 6.7        | 170 | 7.9    | 200 | 9.4  | 238 | 11.7 | 298 | 4.1  | 105 | 3.0  | 75  | 0.6 x 4  | 14 x 4  |
| 1       | 25  | 8.9        | 225 | 7.9    | 200 | 9.4  | 238 | 11.7 | 298 | 4.5  | 115 | 3.3  | 85  | 0.6 x 4  | 14 x 4  |
| 1-1/4   | 32  | 8.9        | 225 | 7.9    | 200 | 10.0 | 253 | 12.3 | 313 | 5.5  | 140 | 3.9  | 100 | 0.7 x 4  | 18 x 4  |
| 1-1/2   | 40  | 8.9        | 225 | 7.9    | 200 | 10.0 | 253 | 12.3 | 313 | 5.9  | 150 | 4.3  | 110 | 0.7 x 4  | 18 x 4  |
| 2       | 50  | 8.9        | 225 | 7.9    | 200 | 10.0 | 253 | 12.3 | 313 | 6.5  | 165 | 4.9  | 125 | 0.7 x 4  | 18 x 4  |
| 2-1/2   | 65  | 11.0       | 280 | 7.9    | 200 | 10.7 | 271 | 13.0 | 331 | 7.3  | 185 | 5.7  | 145 | 0.7 x 4  | 18 x 8  |
| 3       | 80  | 11.0       | 280 | 7.9    | 200 | 10.7 | 271 | 13.0 | 331 | 7.9  | 200 | 6.3  | 160 | 0.7 x 8  | 18 x 8  |
| 4       | 100 | 11.0       | 280 | 9.8    | 250 | 10.9 | 278 | 13.3 | 338 | 9.3  | 235 | 7.5  | 190 | 0.9 x 8  | 22 x 8  |
| 5       | 125 | 15.7       | 400 | 9.8    | 250 | 11.7 | 298 | 14.1 | 358 | 10.6 | 270 | 8.7  | 220 | 1.0 x 8  | 26 x 8  |
| 6       | 150 | 15.7       | 400 | 11.8   | 300 | 12.2 | 310 | 14.6 | 370 | 11.8 | 300 | 9.8  | 250 | 1.0 x 8  | 26 x 8  |
| 8       | 200 | 15.7       | 400 | 13.8   | 350 | 13.3 | 338 | 15.7 | 398 | 14.8 | 375 | 12.6 | 320 | 1.2 x 8  | 30 x 12 |
| 10      | 250 | 19.7       | 500 | 17.7   | 450 | 14.3 | 362 | 16.6 | 422 | 17.7 | 450 | 15.2 | 385 | 1.3 x 12 | 33 x 12 |
| 12      | 300 | 19.7       | 500 | 19.7   | 500 | 16.7 | 425 | 19.1 | 485 | 20.3 | 515 | 17.7 | 450 | 1.3 x 12 | 33 x 16 |
| 14      | 350 | 19.7       | 500 | 21.7   | 550 | 17.7 | 450 | 20.1 | 510 | 22.8 | 580 | 20.1 | 510 | 1.4 x 16 | 36 x 16 |
| 16      | 400 | 23.6       | 600 | 23.6   | 600 | 18.7 | 475 | 21.1 | 535 | 26.0 | 660 | 23.0 | 585 | 1.5 x 16 | 39 x 16 |
| 18      | 450 | 23.6       | 600 | 23.6   | 600 | 19.7 | 500 | 22.0 | 560 | 27.0 | 685 | 24.0 | 610 | 1.5 x 20 | 39 x 20 |
| 20      | 500 | 23.6       | 600 | 23.6   | 600 | 20.7 | 525 | 23.0 | 585 | 29.7 | 755 | 26.4 | 670 | 1.7 x 20 | 42 x 20 |
| 24      | 600 | 23.6       | 600 | 23.6   | 600 | 23.1 | 588 | 25.5 | 648 | 35.0 | 890 | 31.3 | 795 | 1.9 x 20 | 48 x 20 |

Other sizes on request

**IMPORTANT:** ISO\* sensor lay length according to ISO 20456

## Weight and Flow Range

| Size  |      | Estimated Weight<br>with M2000 | Flow Range         |                                 |
|-------|------|--------------------------------|--------------------|---------------------------------|
| in.   | DN   |                                | US                 | Metric                          |
| 1/4   | 6    | 8 (3.5)                        | 0.0134...5.4 GPM   | 0.051...20.4 l/min              |
| 5/16  | 8    | 8 (3.5)                        | 0.0239...9.6 GPM   | 0.09...36.2 l/min               |
| 3/8   | 10   | 8 (3.5)                        | 0.0373...14.9 GPM  | 0.141...57 l/min                |
| 1/2   | 15   | 10 (4.5)                       | 0.084...33.6 GPM   | 0.318...127 l/min               |
| 3/4   | 20   | 10 (4.5)                       | 0.149...60 GPM     | 0.57...226 l/min                |
| 1     | 25   | 11 (5)                         | 0.233...93 GPM     | 0.88...353 l/min                |
| 1-1/4 | 32   | 13 (6)                         | 0.382...153 GPM    | 1.45...579 l/min                |
| 1-1/2 | 40   | 15.5 (7)                       | 0.6...239 GPM      | 2.26...905 l/min                |
| 2     | 50   | 19 (8.5)                       | 0.93...373 GPM     | 3.53...1,414 l/min              |
| 2-1/2 | 65   | 27.5 (12.5)                    | 1.58...631 GPM     | 0.358...143 m <sup>3</sup> /h   |
| 3     | 80   | 31 (14)                        | 2.39...956 GPM     | 0.54...217 m <sup>3</sup> /h    |
| 4     | 100  | 42 (19)                        | 3.73...1,494 GPM   | 0.85...339 m <sup>3</sup> /h    |
| 5     | 125  | 53 (24)                        | 5.8...2,334 GPM    | 1.33...530 m <sup>3</sup> /h    |
| 6     | 150  | 60.5 (27.5)                    | 8.4...3,361 GPM    | 1.91...763 m <sup>3</sup> /h    |
| 8     | 200  | 87 (39.5)                      | 14.9...5,975 GPM   | 3.39...1,357 m <sup>3</sup> /h  |
| 10    | 250  | 129 (58.5)                     | 23.3...9,336 GPM   | 5.3...2,121 m <sup>3</sup> /h   |
| 12    | 300  | 204 (92.5)                     | 33.6...13,444 GPM  | 7.6...3,054 m <sup>3</sup> /h   |
| 14    | 350  | 262 (119)                      | 45.7...18,299 GPM  | 10.4...4,156 m <sup>3</sup> /h  |
| 16    | 400  | 344 (156)                      | 60...23,901 GPM    | 13.6...5,429 m <sup>3</sup> /h  |
| 18    | 450  | 397 (180)                      | 76...30,250 GPM    | 17.2...6,870 m <sup>3</sup> /h  |
| 20    | 500  | 470 (213)                      | 93...37,345 GPM    | 21.2...8,482 m <sup>3</sup> /h  |
| 22    | 550  | 549 (249)                      | 113...45,188 GPM   | 25.7...10,263 m <sup>3</sup> /h |
| 24    | 600  | 617 (280)                      | 134...53,777 GPM   | 30.5...12,214 m <sup>3</sup> /h |
| 28    | 700  | —                              | 183...73,197 GPM   | 41.6...16,625 m <sup>3</sup> /h |
| 30    | 750  | 930 (422)                      | 210...84,027 GPM   | 47.7...19,085 m <sup>3</sup> /h |
| 32    | 800  | 1171 (531)                     | 239...95,604 GPM   | 54.3...21,714 m <sup>3</sup> /h |
| 36    | 900  | 1378 (625)                     | 302...120,999 GPM  | 69...27,482 m <sup>3</sup> /h   |
| 40    | 1000 | —                              | 373...149,381 GPM  | 85...33,928 m <sup>3</sup> /h   |
| 48    | 1200 | 1788 (811)                     | 538...215,109 GPM  | 122...48,857 m <sup>3</sup> /h  |
| 56    | 1400 | —                              | 732...292,787 GPM  | 166...66,499 m <sup>3</sup> /h  |
| 60    | 1500 | 2112 (958)                     | 840...336,108 GPM  | 191...76,338 m <sup>3</sup> /h  |
| 64    | 1600 | 2339 (1061)                    | 956...382,416 GPM  | 217...86,856 m <sup>3</sup> /h  |
| 72    | 1800 | 3219 (1460)                    | 1210...483,996 GPM | 275...109,927 m <sup>3</sup> /h |
| 78    | 2000 | 4101 (1860)                    | 1494...597,525 GPM | 339...135,713 m <sup>3</sup> /h |




### Sensor Type III Specifications

Thanks to its very short lay length, the sensor type III is often the right alternative to a lot of applications. Delivered with a PTFE liner, the sensor type III has a standard nominal pressure of PN 40.


|                             |  |                |
|-----------------------------|--|----------------|
| <b>Size</b>                 | 1...4 in. (DN 25...100)  |                |
| <b>Process Connection</b>   | Wafer connection (in-between flange mounting)                              |                |
| <b>Nominal Pressure</b>     | 580 psi (40 bar)   |                |
| <b>Protection Class</b>     | NEMA 4X (IP67), optional NEMA 6P (IP68)                                    |                |
| <b>Minimum Conductivity</b> | 5 µS/cm (20 µS/cm for demineralized water)                                 |                |
| <b>Liner Materials</b>      | PTFE   |                |
| <b>Electrode Material</b>   | Hastelloy C (Standard), Tantal, Platinum / Gold Plated, Platinum / Rhodium |                |
| <b>Housing</b>              | Carbon Steel / optional stainless steel                                    |                |
| <b>Lay Length</b>           | 1...2 in. (DN 25...50)   | 4 in. (100 mm) |
|                             | 2-1/2...4 in. (DN 65...100)  | 6 in. (150 mm) |

### Sensor Type III Dimensions

#### Remote Version in. (mm)

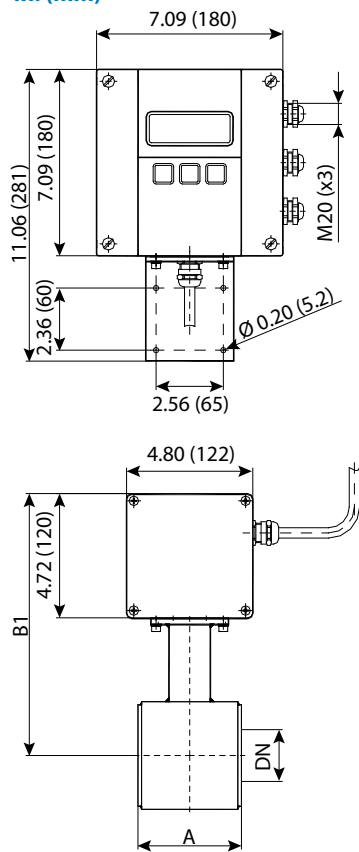

#### Mounted Version in. (mm)

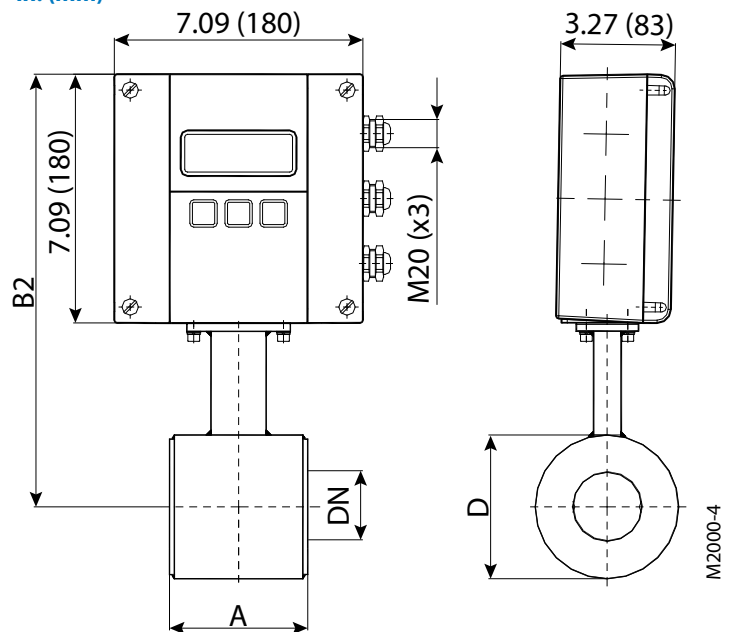

| in.   | DN  | A          | B1          | B2         | D          |
|-------|-----|------------|-------------|------------|------------|
| 1     | 25  | 3.94 (100) | 9.37 (238)  | 7.24 (184) | 2.91 (74)  |
| 1-1/4 | 32  | 3.94 (100) | 9.57 (243)  | 7.44 (189) | 3.31 (84)  |
| 1-1/2 | 40  | 3.94 (100) | 9.76 (248)  | 7.64 (194) | 3.70 (94)  |
| 2     | 50  | 3.94 (100) | 9.96 (253)  | 7.83 (199) | 4.09 (104) |
| 2-1/2 | 65  | 5.91 (150) | 10.47 (266) | 8.35 (212) | 5.08 (129) |
| 3     | 80  | 5.91 (150) | 10.67 (271) | 8.54 (217) | 5.51 (140) |
| 4     | 100 | 5.91 (150) | 10.98 (279) | 8.86 (225) | 6.14 (156) |

580 psi (40 bar)




### Sensor with Sanitary Process Connections Specifications

The sensor model is available with Tri-Clamp® BS4825/ISO2852, DIN11851, and more process connections. The sanitary sensor is delivered in a stainless steel housing and with PTFE/PFA lining.



|                             |   |                             |                    |
|-----------------------------|---|-----------------------------|--------------------|
| <b>Size</b>                 | 3/8...4 in. (DN 10...100)   |                             |                    |
| <b>Process Connection</b>   | Tri-Clamp BS4825/ISO2852, DIN 11851, customer specified, and more                                 |                             |                    |
| <b>Nominal Pressure</b>     | 145/230 psi (10/16 bar)   |                             |                    |
| <b>Protection Class</b>     | NEMA 4X (IP67), optional NEMA 6P (IP68)   |                             |                    |
| <b>Minimum Conductivity</b> | 5 µS/cm (20 µS/cm for demineralized water)  |                             |                    |
| <b>Liner Materials</b>      | PTFE/PFA  | -40...302° F (-40...150° C) |                    |
| <b>Electrode Material</b>   | <b>Standard:</b> Hastelloy C; <b>Optional:</b> Tantal, Platinum / Gold plated, Platinum / Rhodium |                             |                    |
| <b>Housing</b>              | <b>Standard:</b> Carbon Steel; <b>Optional:</b> Stainless Steel                                   |                             |                    |
| <b>Lay Length</b>           | Tri-Clamp Connection  | 3/8...2 in. (DN 10...50)    | 5.71 in. (145 mm)  |
|                             |   | 2-1/2...4 in. (DN 65...100) | 7.87 in. (200 mm)  |
|                             | DIN 11851 Connection  | 3/8...3/4 in. (DN 10...20)  | 6.69 in. (170 mm)  |
|                             |   | 1...2 in. (DN 25...50)      | 8.86 in. (225 mm)  |
|                             |   | 2-1/2...4 in. (DN 65...100) | 11.02 in. (280 mm) |

### DIN 11851 Connection Dimensions

#### Remote Version in. (mm)

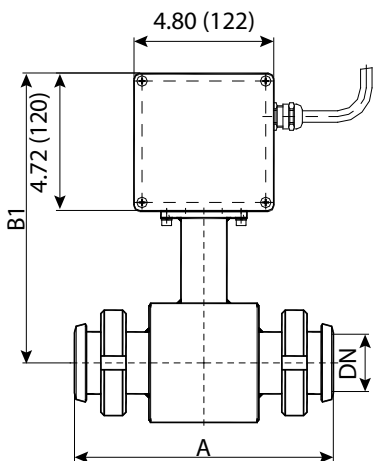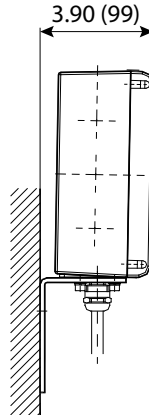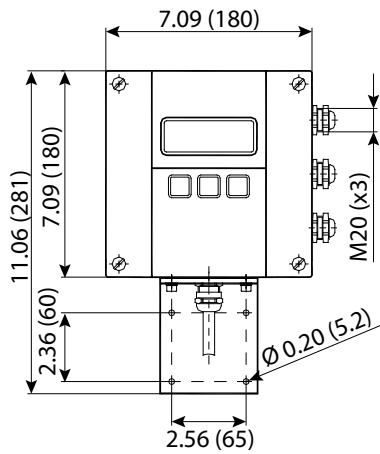

#### Mounted Version in. mm

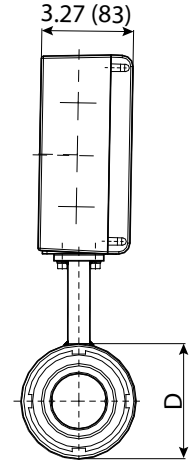
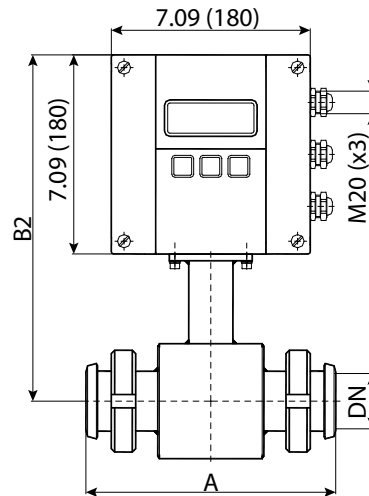


| in.   | DN  | A           | B1          | B2         | D          |
|-------|-----|-------------|-------------|------------|------------|
| 3/8   | 10  | 6.69 (170)  | 9.37 (238)  | 7.24 (184) | 2.91 (74)  |
| 1/2   | 15  | 6.69 (170)  | 9.37 (238)  | 7.24 (184) | 2.91 (74)  |
| 3/4   | 20  | 6.69 (170)  | 9.37 (238)  | 7.24 (184) | 2.91 (74)  |
| 1     | 25  | 8.86 (225)  | 9.37 (238)  | 7.24 (184) | 2.91 (74)  |
| 1-1/4 | 32  | 8.86 (225)  | 9.57 (243)  | 7.44 (189) | 3.31 (84)  |
| 1-1/2 | 40  | 8.86 (225)  | 9.76 (248)  | 7.64 (194) | 3.70 (94)  |
| 2     | 50  | 8.86 (225)  | 9.96 (253)  | 7.83 (199) | 4.09 (104) |
| 2-1/2 | 65  | 11.02 (280) | 10.47 (266) | 8.35 (212) | 5.08 (129) |
| 3     | 80  | 11.02 (280) | 10.67 (271) | 8.54 (217) | 5.51 (140) |
| 4     | 100 | 11.02 (280) | 10.98 (279) | 8.86 (225) | 6.14 (156) |





230 psi (16 bar)

### Tri-Clamp Connection Dimensions

#### Remote Version in. (mm)

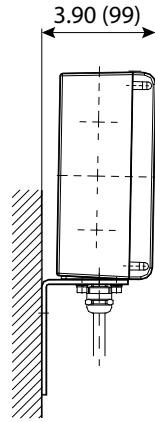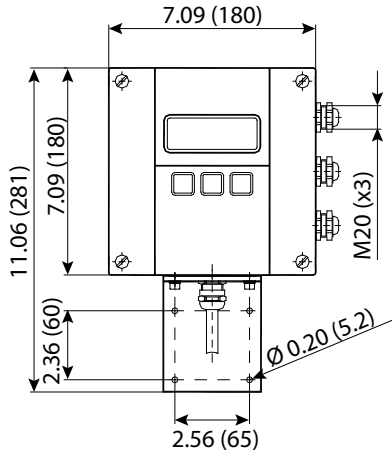


#### Mounted Version in. (mm)

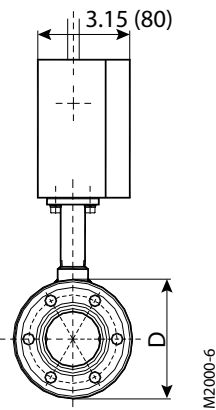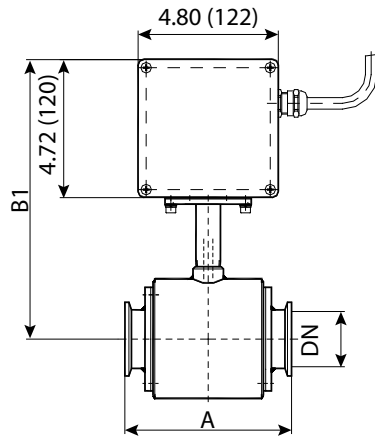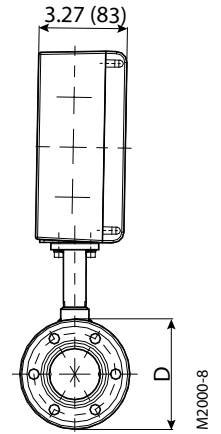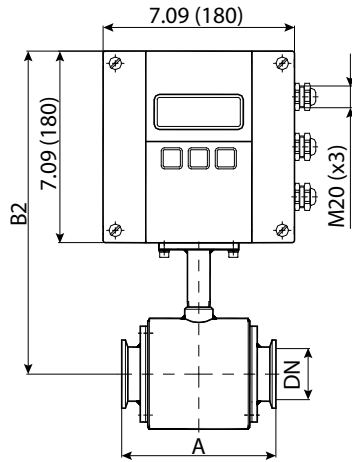

| in.   | DN  | A          | B1          | B2         | D          |
|-------|-----|------------|-------------|------------|------------|
| 3/8   | 10  | 5.71 (145) | 8.98 (228)  | 7.52 (191) | 2.91 (74)  |
| 1/2   | 15  | 5.71 (145) | 8.98 (228)  | 7.52 (191) | 2.91 (74)  |
| 3/4   | 20  | 5.71 (145) | 8.98 (228)  | 7.52 (191) | 2.91 (74)  |
| 1     | 25  | 5.71 (145) | 8.98 (228)  | 7.52 (191) | 2.91 (74)  |
| 1-1/2 | 40  | 5.71 (145) | 9.37 (238)  | 7.91 (201) | 3.70 (94)  |
| 2     | 50  | 5.71 (145) | 9.57 (243)  | 8.11 (206) | 4.09 (104) |
| 2-1/2 | 65  | 7.87 (200) | 10.08 (256) | 8.62 (219) | 5.08 (129) |
| 3     | 80  | 7.87 (200) | 10.28 (261) | 8.82 (224) | 5.51 (140) |
| 4     | 100 | 7.87 (200) | 10.59 (269) | 9.13 (232) | 6.14 (156) |

150 psi (10 bar)

### Tri-Clamp Connection

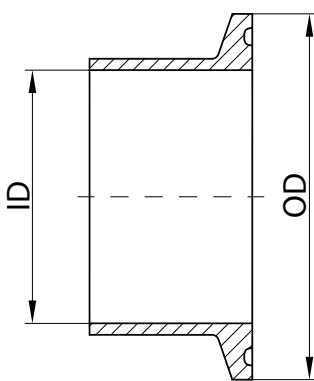


| BS4825 |      |       |      |       | ISO2852 |      |       |      |       |
|--------|------|-------|------|-------|---------|------|-------|------|-------|
| Size   | OD   |       | ID   |       | Size    | OD   |       | ID   |       |
| in.    | in.  | mm    | in.  | mm    | DN      | in.  | mm    | in.  | mm    |
| —      | —    | —     | —    | —     | 10      | 0.98 | 25.0  | 0.55 | 14.0  |
| 1/2    | 0.98 | 25.0  | 0.37 | 9.4   | 15      | 1.99 | 50.5  | 0.71 | 18.1  |
| 3/4    | 0.98 | 25.0  | 0.62 | 15.75 | 20      | 1.99 | 50.5  | 0.90 | 22.9  |
| 1      | 1.99 | 50.5  | 0.87 | 22.1  | 25      | 1.99 | 50.5  | 1.13 | 28.7  |
| —      | —    | —     | —    | —     | 32      | 2.52 | 64.0  | 1.51 | 38.4  |
| 1-1/2  | 1.99 | 50.5  | 1.37 | 34.8  | 40      | 2.52 | 64.0  | 1.74 | 44.3  |
| 2      | 2.52 | 64.0  | 1.87 | 47.5  | 50      | 3.05 | 77.5  | 2.22 | 56.3  |
| 2-1/2  | 3.05 | 77.5  | 2.37 | 60.2  | 65      | 3.58 | 91.0  | 2.84 | 72.1  |
| 3      | 3.58 | 91.0  | 2.87 | 72.9  | 80      | 4.17 | 106.0 | 3.32 | 84.3  |
| 4      | 4.69 | 119.0 | 3.83 | 97.4  | 100     | 5.12 | 130.0 | 4.32 | 109.7 |

Nominal Pressure 145 psi (10 bar)

### OIML APPROVED METER

The M2000 is type approved according to the international water meter standards OIML R49. The meter is approved as Class I and Class II for the detector sizes 2...28 inches (DN 50...800).

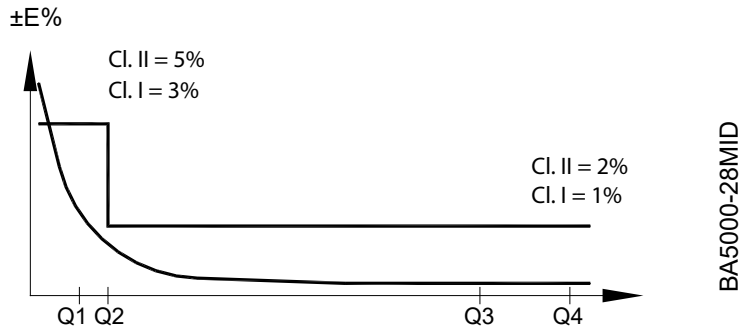


Q2/Q1 = 1.6 and Q4/Q3 = 1.25

| Meter Size |                     | Flow Rates [m <sup>3</sup> /h] |        |       |       | Ratio Q3/Q1 |
|------------|---------------------|--------------------------------|--------|-------|-------|-------------|
|            |                     | Q1                             | Q2     | Q3    | Q4    |             |
| DN 50      | 2 in.               | 0.252                          | 0.4032 | 63    | 78.75 | 250         |
| DN 65      | 2-1/2 in.           | 0.4                            | 0.64   | 100   | 125   | 250         |
| DN 80      | 3 in.               | 0.64                           | 1.024  | 160   | 200   | 250         |
| DN 100     | 4 in.               | 1                              | 1.6    | 250   | 312.5 | 250         |
| DN 125     | 5 in.               | 1.6                            | 2.56   | 400   | 500   | 250         |
| DN 150     | 6 in.               | 2.52                           | 4.032  | 630   | 787.5 | 250         |
| DN 200     | 8 in.               | 4                              | 6.4    | 1000  | 1250  | 250         |
| DN 250     | 10 in.              | 6.4                            | 10.24  | 1600  | 2000  | 250         |
| DN 300     | 12 in.              | 10                             | 16     | 2500  | 3125  | 250         |
| DN 350     | 14 in.              | 10                             | 16     | 2500  | 3125  | 250         |
| DN 400     | 16 in.              | 16                             | 25.6   | 4000  | 5000  | 250         |
| DN 450     | 18 in.              | 25.2                           | 40.32  | 6300  | 7875  | 250         |
| DN 500     | 20 in.              | 25.2                           | 40.32  | 6300  | 7875  | 250         |
| DN 600     | 24 in.              | 25.2                           | 40.32  | 6300  | 7875  | 250         |
| DN 800     | 28 in.              | 40                             | 64     | 10000 | 12500 | 250         |
| OIML R49   | Class 1 and Class 2 |                                |        |       |       |             |

## MID APPROVED METER

The M2000 is type approved according to Directive 2004/22/EC of the European Parliament and Council of March 31, 2004 Measuring Instruments (MID) Annex MI-001. The meter is approved for the detector sizes 2...28 inches (DN 50...800).

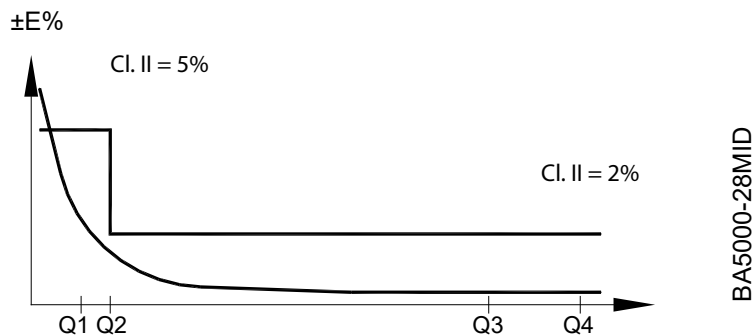

$Q2/Q1 = 1.6$  and  $Q4/Q3 = 1.25$

| Meter Size |           | Flow Rates [m <sup>3</sup> /h] |        |       |       | Ratio Q3/Q1 |
|------------|-----------|--------------------------------|--------|-------|-------|-------------|
|            |           | Q1                             | Q2     | Q3    | Q4    |             |
| DN 50      | 2 in.     | 0.252                          | 0.4032 | 63    | 78.75 | 250         |
| DN 65      | 2-1/2 in. | 0.4                            | 0.64   | 100   | 125   | 250         |
| DN 80      | 3 in.     | 0.64                           | 1.024  | 160   | 200   | 250         |
| DN 100     | 4 in.     | 1                              | 1.6    | 250   | 312.5 | 250         |
| DN 125     | 5 in.     | 1.6                            | 2.56   | 400   | 500   | 250         |
| DN 150     | 6 in.     | 2.52                           | 4.032  | 630   | 787.5 | 250         |
| DN 200     | 8 in.     | 4                              | 6.4    | 1000  | 1250  | 250         |
| DN 250     | 10 in.    | 6.4                            | 10.24  | 1600  | 2000  | 250         |
| DN 300     | 12 in.    | 10                             | 16     | 2500  | 3125  | 250         |
| DN 350     | 14 in.    | 10                             | 16     | 2500  | 3125  | 250         |
| DN 400     | 16 in.    | 16                             | 25.6   | 4000  | 5000  | 250         |
| DN 450     | 18 in.    | 25.2                           | 40.32  | 6300  | 7875  | 250         |
| DN 500     | 20 in.    | 25.2                           | 40.32  | 6300  | 7875  | 250         |
| DN 600     | 24 in.    | 25.2                           | 40.32  | 6300  | 7875  | 250         |
| DN 800     | 28 in.    | 40                             | 64     | 10000 | 12500 | 250         |
| MID MI-001 |           |                                |        |       |       |             |

The conformity declaration of above certificate is according to module B (type approval) and D (quality insurance of production).

# PART NUMBER CONSTRUCTION

| ModMAG® Model M2000   |                             | Model Code |    |   |   |   |   |   |   |  |  |
|---|-----------------------------|------------|----|---|---|---|---|---|---|--|--|
| General area  |                             | P          | M  | A | B | C | D | B | A |  |  |
| <b>Size</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| DN 6  | 14 IN. Inlet PFA / 304 SST  | 002        |    |   |   |   |   |   |   |  |  |
| DN 8  | 5/8 IN. Inlet PFA / 304 SST | 003        |    |   |   |   |   |   |   |  |  |
| DN 10   | 3/4 IN. Inlet PFA / 304 SST | 004        |    |   |   |   |   |   |   |  |  |
| DN 15   | 12 IN.                      | 005        |    |   |   |   |   |   |   |  |  |
| DN 20   | 3/4 IN.                     | 007        |    |   |   |   |   |   |   |  |  |
| DN 25   | 1 IN.                       | 010        |    |   |   |   |   |   |   |  |  |
| DN 32   | 1-1/4 IN.                   | 012        |    |   |   |   |   |   |   |  |  |
| DN 40   | 1-1/2 IN.                   | 015        |    |   |   |   |   |   |   |  |  |
| DN 50   | 2 IN.                       | 020        |    |   |   |   |   |   |   |  |  |
| DN 65   | 2-1/2 IN.                   | 025        |    |   |   |   |   |   |   |  |  |
| DN 80   | 3 IN.                       | 030        |    |   |   |   |   |   |   |  |  |
| DN 100  | 4 IN.                       | 040        |    |   |   |   |   |   |   |  |  |
| DN 150  | 6 IN.                       | 060        |    |   |   |   |   |   |   |  |  |
| DN 200  | 8 IN.                       | 080        |    |   |   |   |   |   |   |  |  |
| DN 250  | 10 IN.                      | 100        |    |   |   |   |   |   |   |  |  |
| DN 300  | 12 IN.                      | 120        |    |   |   |   |   |   |   |  |  |
| DN 350  | 14 IN.                      | 140        |    |   |   |   |   |   |   |  |  |
| DN 400  | 16 IN.                      | 160        |    |   |   |   |   |   |   |  |  |
| DN 450  | 18 IN.                      | 180        |    |   |   |   |   |   |   |  |  |
| DN 500  | 20 IN.                      | 200        |    |   |   |   |   |   |   |  |  |
| DN 600  | 24 IN.                      | 240        |    |   |   |   |   |   |   |  |  |
| DN 700  | 28 IN.                      | 280        |    |   |   |   |   |   |   |  |  |
| DN 800  | 32 IN.                      | 320        |    |   |   |   |   |   |   |  |  |
| DN 900  | 36 IN.                      | 360        |    |   |   |   |   |   |   |  |  |
| DN 1000   | 40 IN.                      | 400        |    |   |   |   |   |   |   |  |  |
| DN 1200   | 48 IN.                      | 480        |    |   |   |   |   |   |   |  |  |
| DN 1400   | 56 IN.                      | 560        |    |   |   |   |   |   |   |  |  |
| DN 1600   | 64 IN.                      | 640        |    |   |   |   |   |   |   |  |  |
| <b>Process connection</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| EN 1092-1 PN 40   |                             | FEE        |    |   |   |   |   |   |   |  |  |
| EN 1092-1 PN 25   |                             | FED        |    |   |   |   |   |   |   |  |  |
| EN 1092-1 PN 16   |                             | FEC        |    |   |   |   |   |   |   |  |  |
| EN 1092-1 PN 10   |                             | FEB        |    |   |   |   |   |   |   |  |  |
| ASME Class 300  |                             | F3B        |    |   |   |   |   |   |   |  |  |
| ASME Class 150  |                             | FAA        |    |   |   |   |   |   |   |  |  |
| TriClamp ISO 2882   |                             | TAE        |    |   |   |   |   |   |   |  |  |
| TriClamp ISO 4825   |                             | TAB        |    |   |   |   |   |   |   |  |  |
| Threads DIN 11851   |                             | DAA        |    |   |   |   |   |   |   |  |  |
| Wafer   |                             | WAA        |    |   |   |   |   |   |   |  |  |
| <b>Range and housing material</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| Carbon Steel (Standard)   |                             | C1         |    |   |   |   |   |   |   |  |  |
| Carbon Steel w/ 316L Part   |                             | C2         |    |   |   |   |   |   |   |  |  |
| 304 Stainless Steel Connection / Housing                                  |                             | S0         |    |   |   |   |   |   |   |  |  |
| 316 Stainless Steel Connection / Housing                                  |                             | S7         |    |   |   |   |   |   |   |  |  |
| Carbon Steel Process Connections (316 Part) / 316 Stainless Steel Housing |                             | C4         |    |   |   |   |   |   |   |  |  |
| <b>Line Material</b>  |                             |            |    |   |   |   |   |   |   |  |  |
| Hard Rubber   |                             | H          |    |   |   |   |   |   |   |  |  |
| PTFE for sizes > DN10 (3/8 IN.)   |                             | P          |    |   |   |   |   |   |   |  |  |
| PFA: DN 6...DN 10 (1/4...3/8 IN.) with PFA liner                          |                             | A          |    |   |   |   |   |   |   |  |  |
| ETFE for sizes > DN25 (1.0 IN.)   |                             | T          |    |   |   |   |   |   |   |  |  |
| <b>Electrode / Measuring, Empty pipe, Grounding</b>                       |                             |            |    |   |   |   |   |   |   |  |  |
| Hastelloy C-22 (Standard / Measuring / Empty pipe & Grounding)            |                             | A          |    |   |   |   |   |   |   |  |  |
| Hastelloy C-22 (Standard / Measuring & Empty pipe)                        |                             | J          |    |   |   |   |   |   |   |  |  |
| AG 316L/437L  |                             | B          |    |   |   |   |   |   |   |  |  |
| Tantalum  |                             | C          |    |   |   |   |   |   |   |  |  |
| Platinum/Rhodium  |                             | D          |    |   |   |   |   |   |   |  |  |
| <b>Grounding Ring</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| No Grounding Rings  |                             | X          |    |   |   |   |   |   |   |  |  |
| 304 Stainless Steel Grounding Rings                                       |                             | A          |    |   |   |   |   |   |   |  |  |
| 316 Stainless Steel Grounding Rings                                       |                             | B          |    |   |   |   |   |   |   |  |  |
| <b>Meter Level/Output</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| Standard  |                             | B          |    |   |   |   |   |   |   |  |  |
| ISO 20566   |                             | O          |    |   |   |   |   |   |   |  |  |
| <b>Transmitter, Power Supply, Hardware</b>                                |                             |            |    |   |   |   |   |   |   |  |  |
| 100/240V AC, Meter-Mounted  |                             | SA         | AA | C |   |   |   |   |   |  |  |
| 100/240V AC, Remote-Mounted   |                             | RA         | AA | C |   |   |   |   |   |  |  |
| 12...32V DC, Meter-Mounted  |                             | SA         | AB | C |   |   |   |   |   |  |  |
| 12...32V DC, Remote-Mounted   |                             | RA         | AB | C |   |   |   |   |   |  |  |
| <b>Enclosure, Box</b> (for remote mounted version)                        |                             |            |    |   |   |   |   |   |   |  |  |
| Aluminum Enclosure, IP67 (Type 6/AX) Rating                               |                             | A          |    |   |   |   |   |   |   |  |  |
| Aluminum Enclosure, IP68 (Type 6P) Rating (submersible option)            |                             | B          |    |   |   |   |   |   |   |  |  |
| Stainless Steel Enclosure, IP67 (Type 6/AX) Rating                        |                             | C          |    |   |   |   |   |   |   |  |  |
| Stainless Steel Enclosure, IP68 (Type 6P) Rating (submersible option)     |                             | D          |    |   |   |   |   |   |   |  |  |
| <b>None 1 Used for "Sensor-Mounted" Transmitters Configurations</b>       |                             |            |    |   |   |   |   |   |   |  |  |
| <b>None 1 Used for "Sensor-Mounted" Transmitters Configuration</b>        |                             |            |    |   |   |   |   |   |   |  |  |
| <b>Input/Output Channel</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| <b>Standard Input/Output</b>  |                             |            |    |   |   |   |   |   |   |  |  |
| <b>Communications</b>   |                             |            |    |   |   |   |   |   |   |  |  |
| Standard Communication (RS232 Modbus RTU)                                 |                             | B          |    |   |   |   |   |   |   |  |  |
| Modbus RTU (RS-485)   |                             | L          |    |   |   |   |   |   |   |  |  |
| HART  |                             | P          |    |   |   |   |   |   |   |  |  |
| Profibus DP   |                             | E          |    |   |   |   |   |   |   |  |  |
| Modbus TCP/IP   |                             | G          |    |   |   |   |   |   |   |  |  |
| EtherNet/IP, ODVA   |                             | H          |    |   |   |   |   |   |   |  |  |
| M-Bus wired   |                             | M          |    |   |   |   |   |   |   |  |  |
| BACnet/IP   |                             | N          |    |   |   |   |   |   |   |  |  |
| BACnet MS/TP  |                             | Q          |    |   |   |   |   |   |   |  |  |
| <b>Wiring Method</b>  |                             |            |    |   |   |   |   |   |   |  |  |
| Twist Tight; 5 ft. (1.52 m)   |                             | TF         |    |   |   |   |   |   |   |  |  |
| Twist Tight; 10 ft. (3.05 m)  |                             | TH         |    |   |   |   |   |   |   |  |  |
| Twist Tight; 25 ft. (7.62 m)  |                             | TJ         |    |   |   |   |   |   |   |  |  |
| Twist Tight; 75 ft. (22.86 m)   |                             | TK         |    |   |   |   |   |   |   |  |  |
| <b>None 1 No Endpoint (Standard)</b>                                      |                             |            |    |   |   |   |   |   |   |  |  |
| <b>Units/Scale</b>  |                             |            |    |   |   |   |   |   |   |  |  |
| Gallons/gallons per minute (North America Standard)                       |                             | NA         |    |   |   |   |   |   |   |  |  |
| Gallons/cubic feet per minute   |                             | NC         |    |   |   |   |   |   |   |  |  |
| Gallons/cubic meters per second   |                             | ND         |    |   |   |   |   |   |   |  |  |
| Cubic Meters/gallons per minute   |                             | NE         |    |   |   |   |   |   |   |  |  |
| Cubic Feet/gallons per minute   |                             | NI         |    |   |   |   |   |   |   |  |  |
| Cubic Feet/cubic feet per minute  |                             | NK         |    |   |   |   |   |   |   |  |  |
| Cubic Feet/cubic meters per hour  |                             | NL         |    |   |   |   |   |   |   |  |  |
| Million Gallons/gallons per minute  |                             | NM         |    |   |   |   |   |   |   |  |  |
| Million Gallons/gallons per minute  |                             | NS         |    |   |   |   |   |   |   |  |  |
| Gallons/millions gallons per day  |                             | NT         |    |   |   |   |   |   |   |  |  |
| Acre Feet/gallons per minute  |                             | NV         |    |   |   |   |   |   |   |  |  |
| Second Foot Day/cubic feet per second                                     |                             | NW         |    |   |   |   |   |   |   |  |  |
| <b>Standard (Default Metric units based on size)</b>                      |                             |            |    |   |   |   |   |   |   |  |  |
| m <sup>3</sup> /s and m <sup>3</sup>                                      |                             | EA         |    |   |   |   |   |   |   |  |  |
| m <sup>3</sup> /min and m <sup>3</sup>                                    |                             | EB         |    |   |   |   |   |   |   |  |  |
| m <sup>3</sup> /h and m <sup>3</sup>                                      |                             | EC         |    |   |   |   |   |   |   |  |  |
| L/s and L   |                             | ED         |    |   |   |   |   |   |   |  |  |
| L/min and L   |                             | EE         |    |   |   |   |   |   |   |  |  |
| L/h and L   |                             | EF         |    |   |   |   |   |   |   |  |  |
| <b>Factory &amp; Tagging</b>  |                             |            |    |   |   |   |   |   |   |  |  |
| 0.2% 3-Point Calibration; Factory (Standard)                              |                             | F          |    |   |   |   |   |   |   |  |  |
| 0.2% 3-Point Calibration in Factory / Stainless steel Tag                 |                             | S          |    |   |   |   |   |   |   |  |  |
| 0.5% 1-Point Calibration; Factory   |                             | L          |    |   |   |   |   |   |   |  |  |
| 0.5% 1-Point Calibration in Factory / Stainless steel Tag                 |                             | M          |    |   |   |   |   |   |   |  |  |
| OIML R49 Cl 1 TYPE CALIBRATED; 3PT; Q1-Q3                                 |                             | N          |    |   |   |   |   |   |   |  |  |
| 3rd Party Calibrated  |                             | S          |    |   |   |   |   |   |   |  |  |
| 3rd Party Calibrated w/ Stainless Steel Tag                               |                             | T          |    |   |   |   |   |   |   |  |  |
| State of Kansas Certified (North America only)                            |                             | K          |    |   |   |   |   |   |   |  |  |

**INTENTIONAL BLANK PAGE**

**Control. Manage. Optimize.**

ModMAG is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2024 Badger Meter, Inc. All rights reserved.

[www.badgermeter.com](http://www.badgermeter.com)