

spectro::lyser™ titanium pro

spectro::lyser™ titanium pro monitors depending on the application an individual selection of: TSS, turbidity, NO₃-N, COD, BOD, TOC, DOC, UV254, NO₂-N, color, BTX, O₃, HS-, fingerprints,spectral alarms and temperature

- S::can plug & measure
- measuring principle: UV-Vis spectrometry over the total range (190-750 nm)
- ideal for industrial waste water, desalination and sea water
- rugged design with titanium grade 2 housing
- factory precalibrated, with advanced calibration service included
- long term stable and maintenance free in operation
- automatic cleaning with compressed air or brush
- mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- multiparameter probe with adjustable open path length
- adaption of optical path lengths to 35 mm, 5 mm, 2 mm or 0.5 mm possible
- easy mounting without clogging




up to 10 bar
operating pressure



up to 50 °C
operating temperature



highly resistant
titanium grade 2

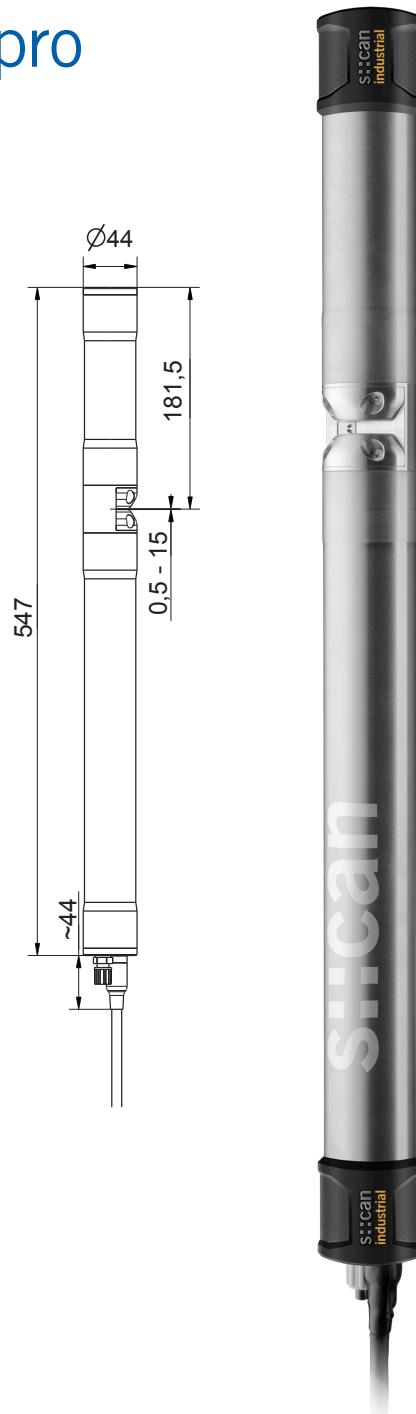

recommended accessories	
part number	article name
D-330-xxx	con::cube V3
B-32-xxx	S::can compressor
B-44	cleaning valve
B-44-2	
F-120-V3	carrier s::can spectrometer V3 & V2 probe, vertical attachment
F-48-V3	spectrometer V3 & V2 flow-cell (bypass setup), PVC
S-11-xx-moni	moni::tool Software
C-32-MIL	Adapter cable to connect a V2 spectrometer (MIL) to V3 Terminal (M12)

technical specification

measuring principle	UV-Vis spectrometry 190 - 750 nm UV spectrometry 190 - 390 nm	cable length	7.5 m fixed cable (-075) or 1 m fixed cable (-010)
measuring principle detail	xenon flash lamp, 256 photo diodes	cable type	PU jacket
automatic compensation instrument	two beam measurement, complete spectrum	housing material	titanium grade 2 (3.7035)
automatic compensation cross sensitivities	turbidity / solids / organic substances	window material	optical path length 5 ... 0.5 mm: sapphire optical path length 35 mm: fused silica (UV-grade)
precalibrated ex-works	all parameters	weight (min.)	2.8 kg (incl. cable)
accuracy standard solution (>1 mg/l)	NO ₃ -N: +/- 2% +1/OPL[mg/l]* COD-KHP: +/-2% +10/OPL[mg/l]* (* OPL ... optical pathlength in mm)	dimensions (Ø x l)	44 mm x 547 mm / 591 mm
access to raw signals	access to spectral information	operating temperature	0 ... 50 °C
reference standard	distilled water	operating pressure	0 ... 10 bar
onboard memory	656 KB	installation / mounting	submersed or in a flow cell
integrated temperature sensor	-10 ... 50 °C	flow velocity	3 m/s (max.)
resolution temperature sensor	0.1 °C	mechanical stability	30 Nm
integration via	con::lyte con::nect	ingress protection class	IP68
power supply	11 ... 15 VDC	automatic cleaning	media: compressed air or autobrush
power consumption (typical)	4.2 W	storage temperature	-10 ... 50 °C
power consumption (max.)	20 W	conformity - EMC	EN 61326-1, EN 61326-2-3
interface to s::can terminals	MIL connector, RS485	conformity - safety	EN 61010-1
interface to third party terminals	con::nect incl. gateway modbusRTU	standard guarantee	1 years
		extended guarantee (optional)	3 years

paper mill WWTP effluent

		parameter							
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO ₃ -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]		part number
spectro::lyser™ UV-Vis (TSS, NO ₃ -N, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	0		SP-1-002-p0-s-TI-010 / -075 (incl. Global Calibration q1)
	max.	1000	350	350	10	1250	1000		

brewery WWTP influent

		parameter						
		TSS [mg/l]	COD [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]		part number	
spectro::lyser™ UV-Vis (TSS, COD, UV254, UV254f)	min.	0	0	0	0		SP-1-002-p0-s-TI-010 / -075	
	max.	5000	45000	1250	1000			(incl. Global Calibration b1)

dairy WWTP influent

		parameter								
		TSS [mg/l]	COD [mg/l]	COD f [mg/l]	NO ₃ -N [mg/l]	UV254 [Abs/m]	UV254 f [Abs/m]		part number	
spectro::lyser™ UV-Vis (TSS, NO ₃ -N, COD, CODf, UV254, UV254f)	min.	0	0	0	0	0	0		SP-1-500-p0-s-TI-010 / -075 (incl. Global Calibration m1)	
	max.	6000	12500	6000	80	2500	2000			